




Circular duct damper **DSL / DS(E)**

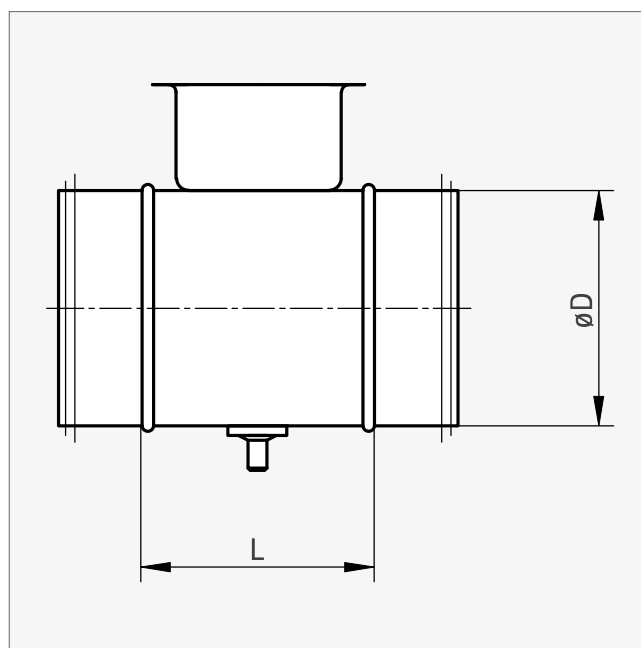

PRODUCT CHARACTERISTICS:

- stitch welded
- standard version - with SPIRO mechanism
- produced with returned (DS) or sharp edges (DSE)
- gasket is positioned by returned edges (DSL)
- from a diameter of 500 mm we recommend the use of an multi-blade damper with round ending **DSL-PW** (see page 102)

MATERIAL:

- galvanized steel
- EPDM rubber gasket (DSL)

Part of a certified ventilation system **with increased airtightness class D**.

Note: pressure loss diagram - see page 251

ØD [mm]	DSL / DS		DSE	
	L [mm]		L [mm]	
80	94	24 P12		
100	94	40 P6		
125	94	27 P6		
140	94	32 P4		
150	94	30 P4		
160	94	24 P4		
180	94	20 P4		
200	94	36 P2		
224	94	30 P2		
250	98	36 P1		
280	98	12 P2		
300	98	12 P2		

Packaging [pcs | type]

T L: ±5 mm

ØD [mm]	DSL / DS		DSE	
	L [mm]		L [mm]	
315	98	25 P1		
350			104	
355	98	20 P1		
400	120	15 P1	120	15 P1
450	120	10 P1	120	10 P1
500	120	9 P1	120	10 P1
560	120	4 P2	120	6 P1
600			120	
630	120	5 P1	120	5 P1
710	120	4 P1	120	5 P1
800	120	3 P1	120	