



## DESCRIPTION


**Material:** TEXOFLEX-ISO NWR is fully flexible pipe, thermally and acoustically isolated with the internal core that is covered with high density material. The pipe is externally coated with the material consisting of multi layer aluminium and polyester.

**Application:** Air conditioning and ventilation systems, to prevent condensation, to prevent loss of energy, to prevent transfer of noise from the machines. Recommendable installation into public and private facilities, hospitals, banks, laboratories, clinics, schools, shopping centres...

🔥 **Application temperature :** -30°C to +140°C    ⚙️ **Diameters:** 82 mm to 406mm    🎨 **Colour:** aluminium    ➡️ **Manufacturing lengths:** 1m

⚡ **Operating pressure :** to 2000 Pa    ⚡ **Max. fluid velocity:** to 10m/sek    # **Ident:** C39+diameter +length

| Internal diameter Ø=D / mm / | Name     | Manufacturing length /mm/ | ID number |
|------------------------------|----------|---------------------------|-----------|
| 82                           | ISO NW R | L=1 m                     | C3908201  |
| 102                          | ISO NW R | L=1 m                     | C3910201  |
| 127                          | ISO NW R | L=1 m                     | C3912701  |
| 152                          | ISO NW R | L=1 m                     | C3915201  |
| 160                          | ISO NW R | L=1 m                     | C3916001  |
| 180                          | ISO NW R | L=1 m                     | C3918001  |
| 203                          | ISO NW R | L=1 m                     | C3920301  |
| 254                          | ISO NW R | L=1 m                     | C3925401  |
| 305                          | ISO NW R | L=1 m                     | C3930501  |
| 315                          | ISO NW R | L=1 m                     | C3931501  |
| 356                          | ISO NW R | L=1 m                     | C3935601  |
| 406                          | ISO NW R | L=1 m                     | C3940601  |

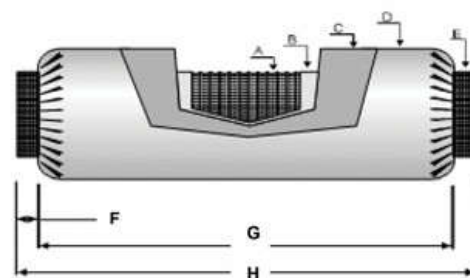

- A. Internal core
- B. Baffle
- C. Insulation
- D. Jacket
- E. Reinforced aluminium tape

**Internal dia.:** 152mm + 1.0 / -0.0  
**Outer dia.:** 205mm + 1,0 / -0.0

**Length F:** 0.08m  
**Length G:** 1.00m  
**Length H:** 1.16m  
**Compressed length:** 0.40m

